

Voice Gateways

HG-4000/3U — VoIP-GSM Gateway

Connect between your VoIP and GSM networks and reduce your operating costs



HG-4000/3U VoIP-GSM Gateway

About Hypermedia Systems Ltd.

Hypermedia Systems Ltd. develops and markets next-generation telecommunication products. Optimized for medium-to-large enterprises, our products create ways for companies to upgrade current telecommunication systems while leveraging their existing telecom investment.

sales@hyperms.com
info@hyperms.com

Reduce Telephony Expenses

Introduce new cost-saving equipment and reduce telephony costs. For example, eliminate the expenses on international calls placed from mobile phones. The HG-4000/3U eliminates local and international interconnection charges between fixed and mobile networks and capitalizes on mobile-to-mobile call rates.

Increase Savings with Advanced LCR

Least Cost Routing maximizes available resources according to the specific needs of each enterprise. The HG-4000/3U LCR functionality and routing groups smartly route calls based on rules created by the administrator. This results in per-call routing. In contrast, without LCR, all call routes are fixed.

Leverage Existing Telecom Investment

Connect the HG-4000/3U directly to the current VoIP infrastructure—as is. SMBs and SMEs benefit from low cost implementation and then enjoy cost-effective routing of incoming and outgoing cellular and VoIP calls.

Business Class Quality and Reliability

High quality of service assures satisfied callers. Reliable and robust, the Hypermedia's HG-4000/3U gateway makes VoIP GSM calls easy and comfortable. The digital interface offers fast call connection, superior voice quality and continuous line availability.

Grow With Ease

Given the system's flexibility, modularity and scalability, the VoIP GSM Gateway can easily be expanded to meet growing call traffic requirements. You will not need to replace equipment or learn new dialing rules. Instead, you simply add to, or reconfigure, the existing equipment.



Voice Gateways

HG-4000/3U — VoIP-GSM Gateway

Hypermedia HG-4000/3U System Specifications:

Interfaces & protocols

ISDN and VoIP interfaces are optional add-ons

PRI: DSS1 (Q.931, national variants), E1/T1,
TE/NT, CRC4/double frame

BRI: Euro-ISDN

GSM: Sierra Wireless Q26 / Telit GE910

CDMA: Sierra Wireless Q26 / Telit CE910

UMTS: Sierra Wireless Q26 / Telit HE910

IP/Ethernet: 10/100 Base-T, RJ-45

Voice over IP

Voice compression: G.723, G.729, G.711

Echo cancellation: G.168

Signaling: H.323 or SIP

QoS: RSVP, DiffServ

Management & Control

Web-based management

Antenna

Omni-directional: 3dB, indoor antenna with a 3m cable
one antenna per four channels

General

Dimensions: 482x133x280 mm
(84HPx3Ux280 mm)

Weight: Minimum 7kg
(based on the system configuration)

Housing: 19" rack-mountable

Power: Max 230VA, 100-240VAC


Environmental temp: +5°C to +45°C

Humidity: 5% to 95% (non-condensing)

Note: Technical data is subject to change without
prior notice

HG-4000/3U topology

The HG-4000/3U connects between mobile networks and the VoIP world, eliminating local and international interconnection charges between fixed and mobile networks.

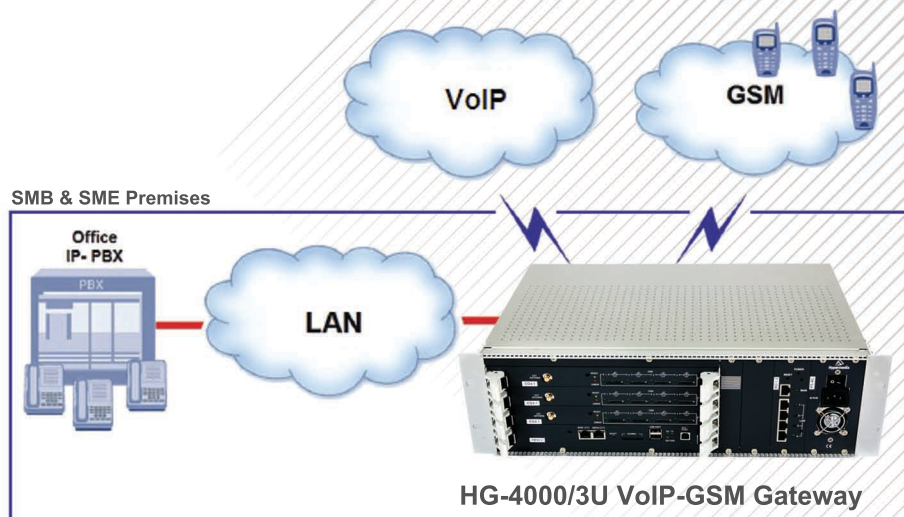

Highlights

- Mobile GSM Solution for IP-PBX
- Fast and Easy Installation: Add-on appliance
- Scalable: from 4 to 12 simultaneous calls
- Advanced Least Cost Routing
- Customer Premises Equipment (CPE)
- Fast Return on Investment (ROI)
- Supports Callback and DISA for Remote Workers
- Easy, browser-based configuration and management
- Supports an optional ISDN-PRI interface